

MotionProtect Plus Fibra

Wired indoor IR motion detector with additional K-band microwave sensor to filter thermal interferences



2
GRADE
EN 50131

PD 6662
2017



The device is compatible only with hubs supporting Fibra protocol. Find the detailed information by QR code or the link:

 <https://ajax.systems/support/devices/motionprotect-plus-fibra/>



MotionProtect Plus Fibra is the device of the new Fibra wired product line. Such devices can only be purchased, installed and administered by accredited Ajax partners.




Up to 12 m detection distance and 88.5°/80° viewing angles





Thermal interference filter with additional K-band microwave sensor



SmartDetect software algorithm to prevent false alarms




Immunity to pets with a weight of up to 20 kg and height up to 50 cm

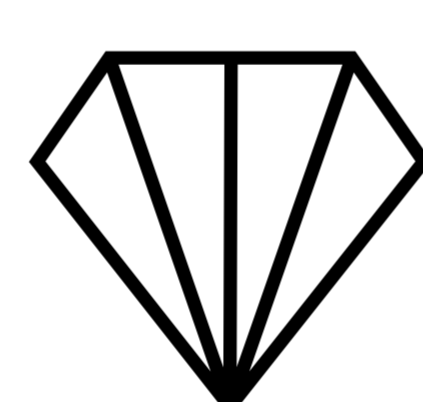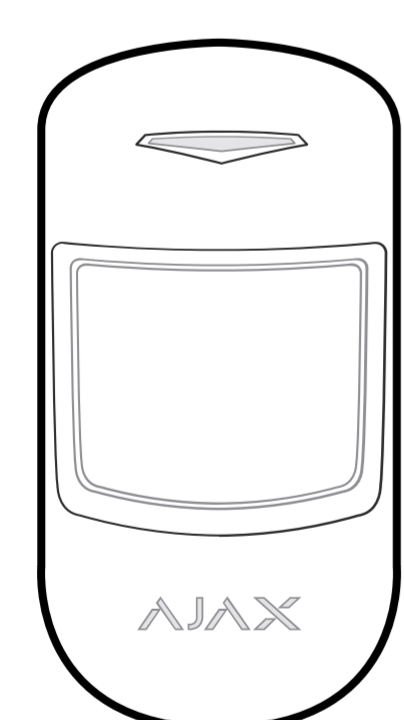

Fibra


communication technology

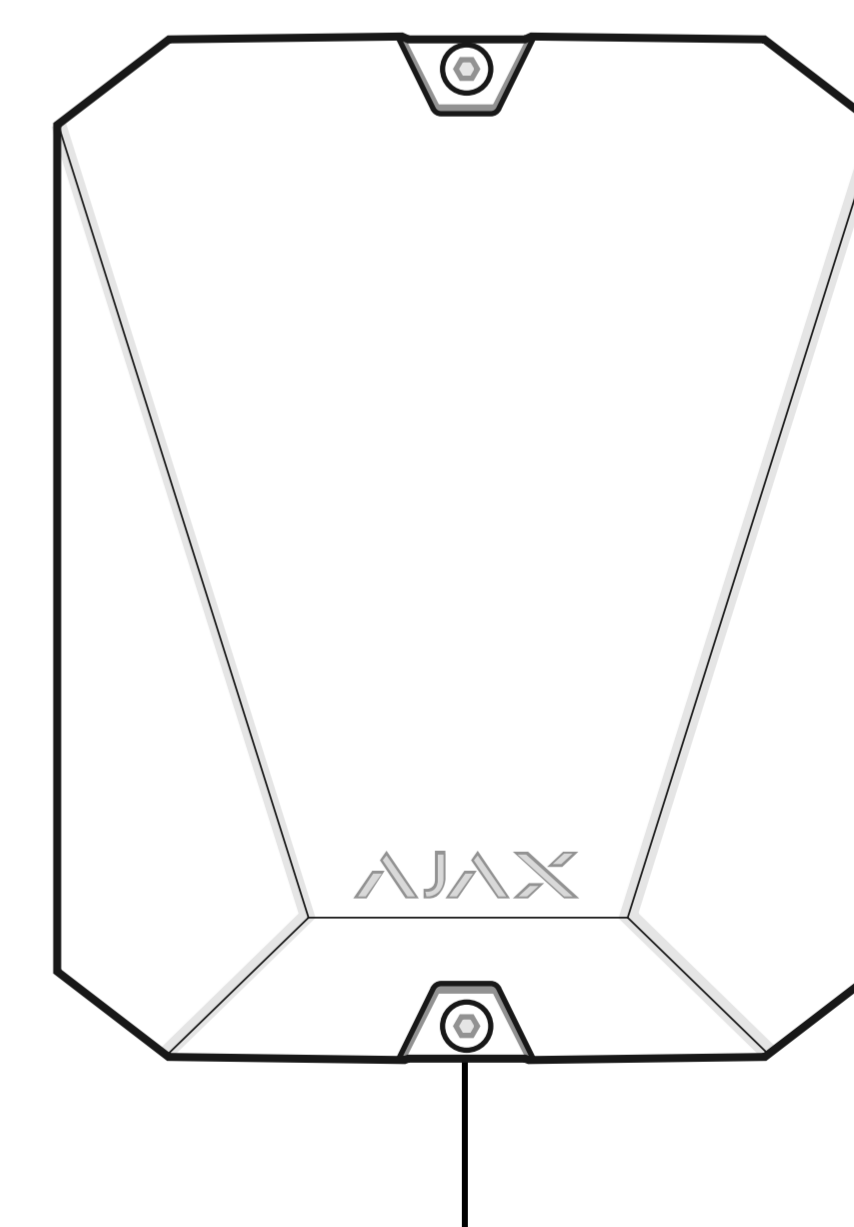


Fibra is a **two-way wired protocol**, ensuring fast and secure communication between hubs and devices. Based on a **bus connection method**, Fibra delivers instant data-rich alarms: security companies and users know which device was triggered, when and where it happened.

Fibra features **encryption** and **authentication** to prevent forgery, as well as **polling** to display device's status in real time. Supporting **up to 2,000 m** of wired connectivity, Fibra is ready to protect any facilities, and deliver **the best user experience** for both end users and installers.

Возможности системы




Шинное подключение к хабу




Дальность двусторонней защищённой связи до 2000 м

12–300
sec


Опрос устройств системы хабом с минимальным периодом



Подключение к хабу по QR-коду или с помощью функции сканирования шин





Удалённая настройка в приложениях для ПК и смартфонов



Уведомления о сработках тампера

Углы обзора PIR-сенсора

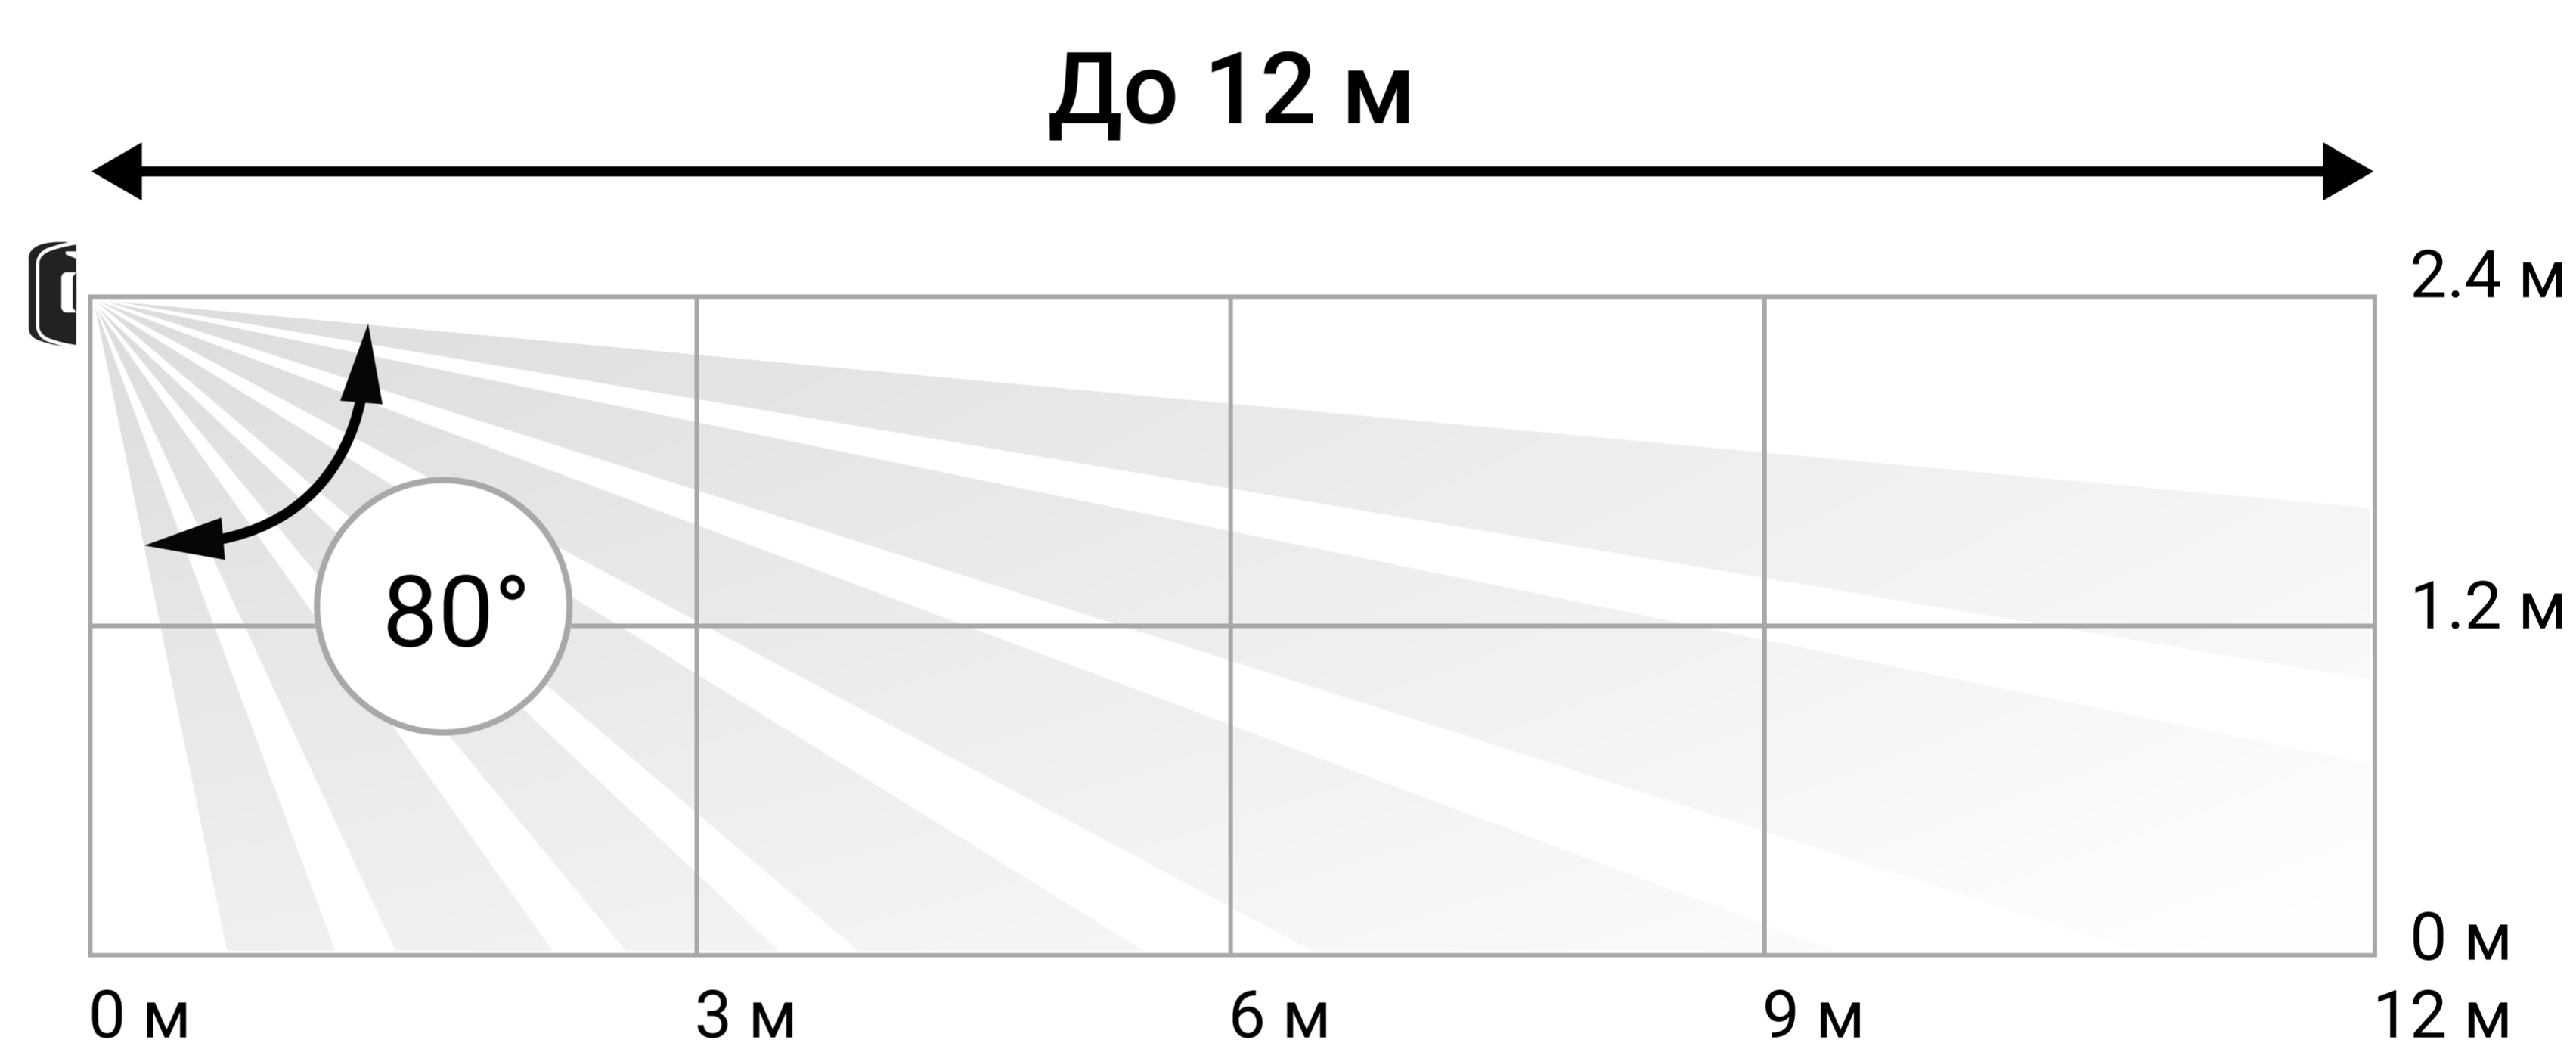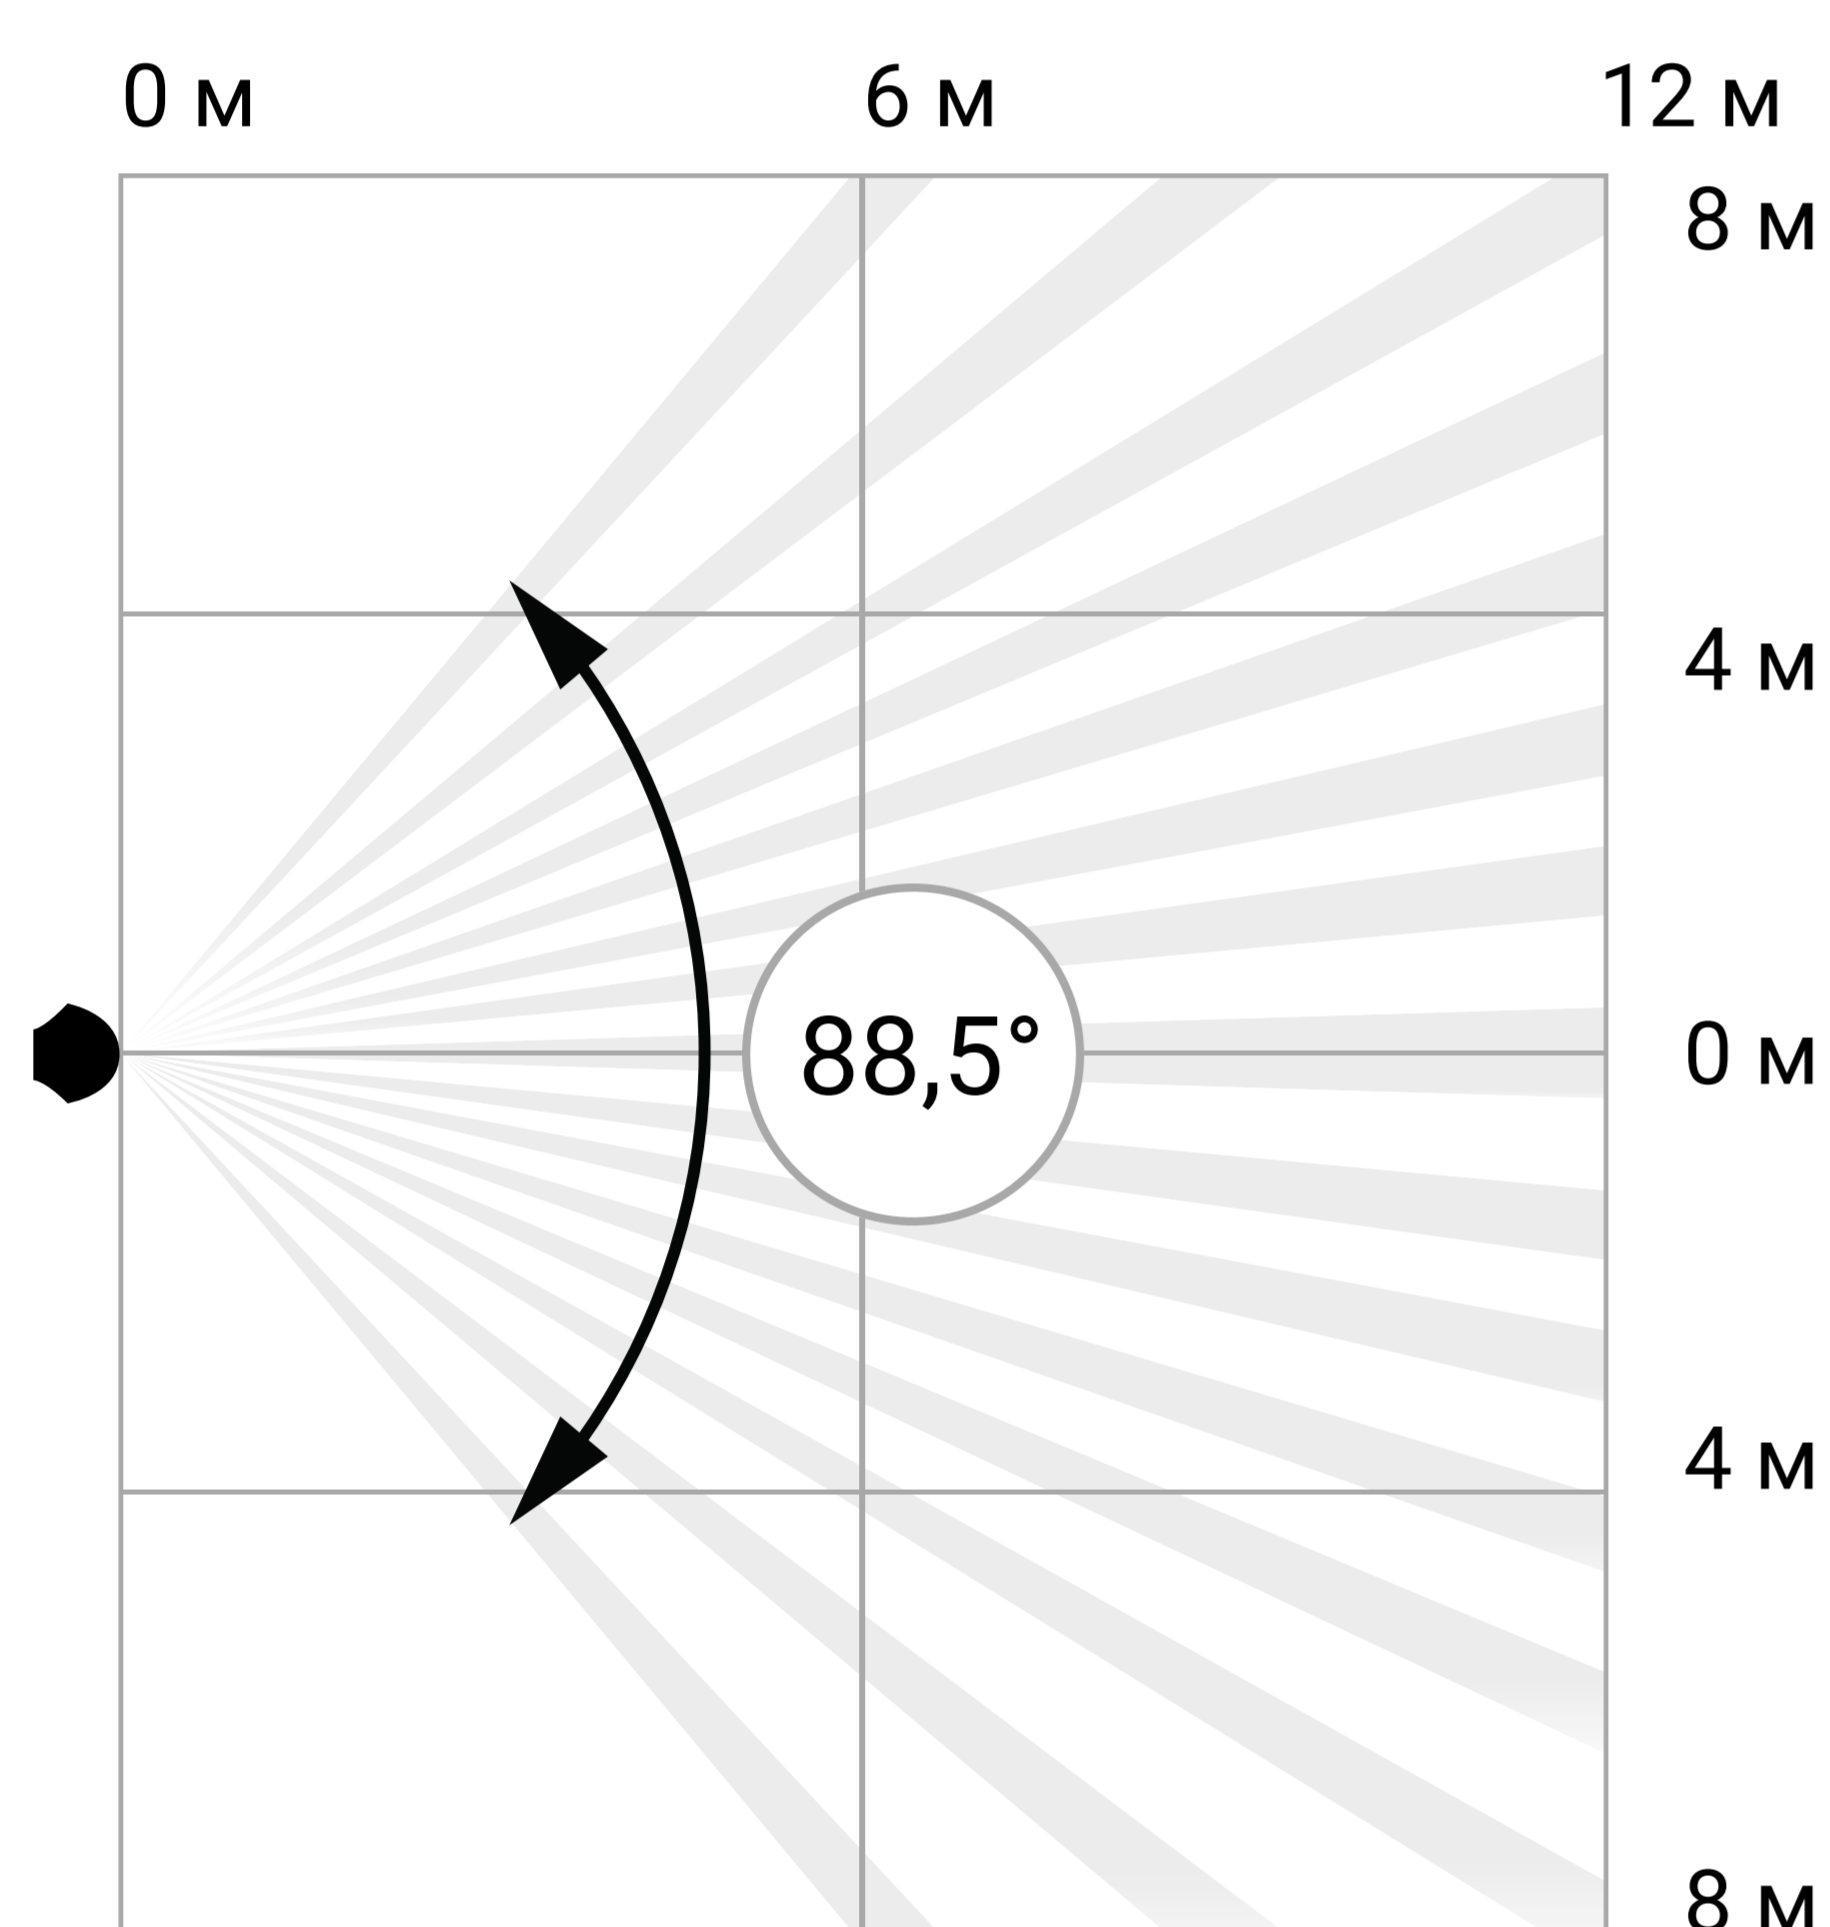

Технические характеристики

<p>Соответствие стандартам</p> <p>EN 50131 (Grade 2) PD 6662:2017</p>	<p>Совместимость</p> <p>Хабы Hub Hybrid (2G) Hub Hybrid (4G)</p> <p>Ретрансляторы нет</p>
---	---

<p>Communication with control panel</p>	<p> Fibra communication technology</p> <p>Communication range up to 2,000 m with U/UTP cat.5 4×2×0,51 cable</p> <p>Polling interval 12–300 sec Set automatically</p>	<p>Motion detection</p>	<p>Sensing elements PIR sensor K-band microwave sensor</p> <p>Motion detection distance up to 12 m</p> <p>Detection angles horizontally – 88.5° vertically – 80°</p> <p>Sensitivity 3 levels Set by admin in the app</p> <p>Pet immunity Filters false alarms on pets weighing up to 20 kg and up to 50 cm height</p>
<p>Power supply</p>	<p>24 V_{DC}, up to 50 μA</p>	<p>Installation</p>	<p>Operating temperature range from –10°C to +40°C</p> <p>Operating humidity up to 75%</p> <p>Ingress protection IP50</p>
<p>Casing</p>	<p>Colour white, black</p> <p>Dimensions 110 × 67 × 62 mm</p> <p>Weight 86 g</p> <p>Tampering alarm yes</p>	<p>Complete set</p>	<p>MotionProtect Plus Fibra SmartBracket Installation kit Quick Start Guide</p>