2.6.01.05.28446 TEMP_DH_IPC-HX5XXX-Volt_MultiLang_PN_Stream3_V2.800.103F001.0.D.201110.zip

Release note:

Based on：DH_IPC-HX5XXX-Volt_Eng_P_Stream3_V2.800.00AD000.0.R.200729

1. Mask Detection children 6 years old and younger would not detected.
2. One-key black screen is enabled by default.
3. The Face Detection-Mask Detection of Smart Plan is enabled by default.
4. Add attached German audio in Camera-audio-alarm audio to the package. (In this way, the user does not need to manually add)
5. Support German and English language.
6. The parameters under the Face Detection menu are set to the following values as default, refer the pictures below.

Note:

1. WDR can be enabled if needed. However, it will slightly affect the Mask Detection Algorithm accuracy.
2. The Mask Detection Sensor installation guide is following the Face Detection deployment requirement.

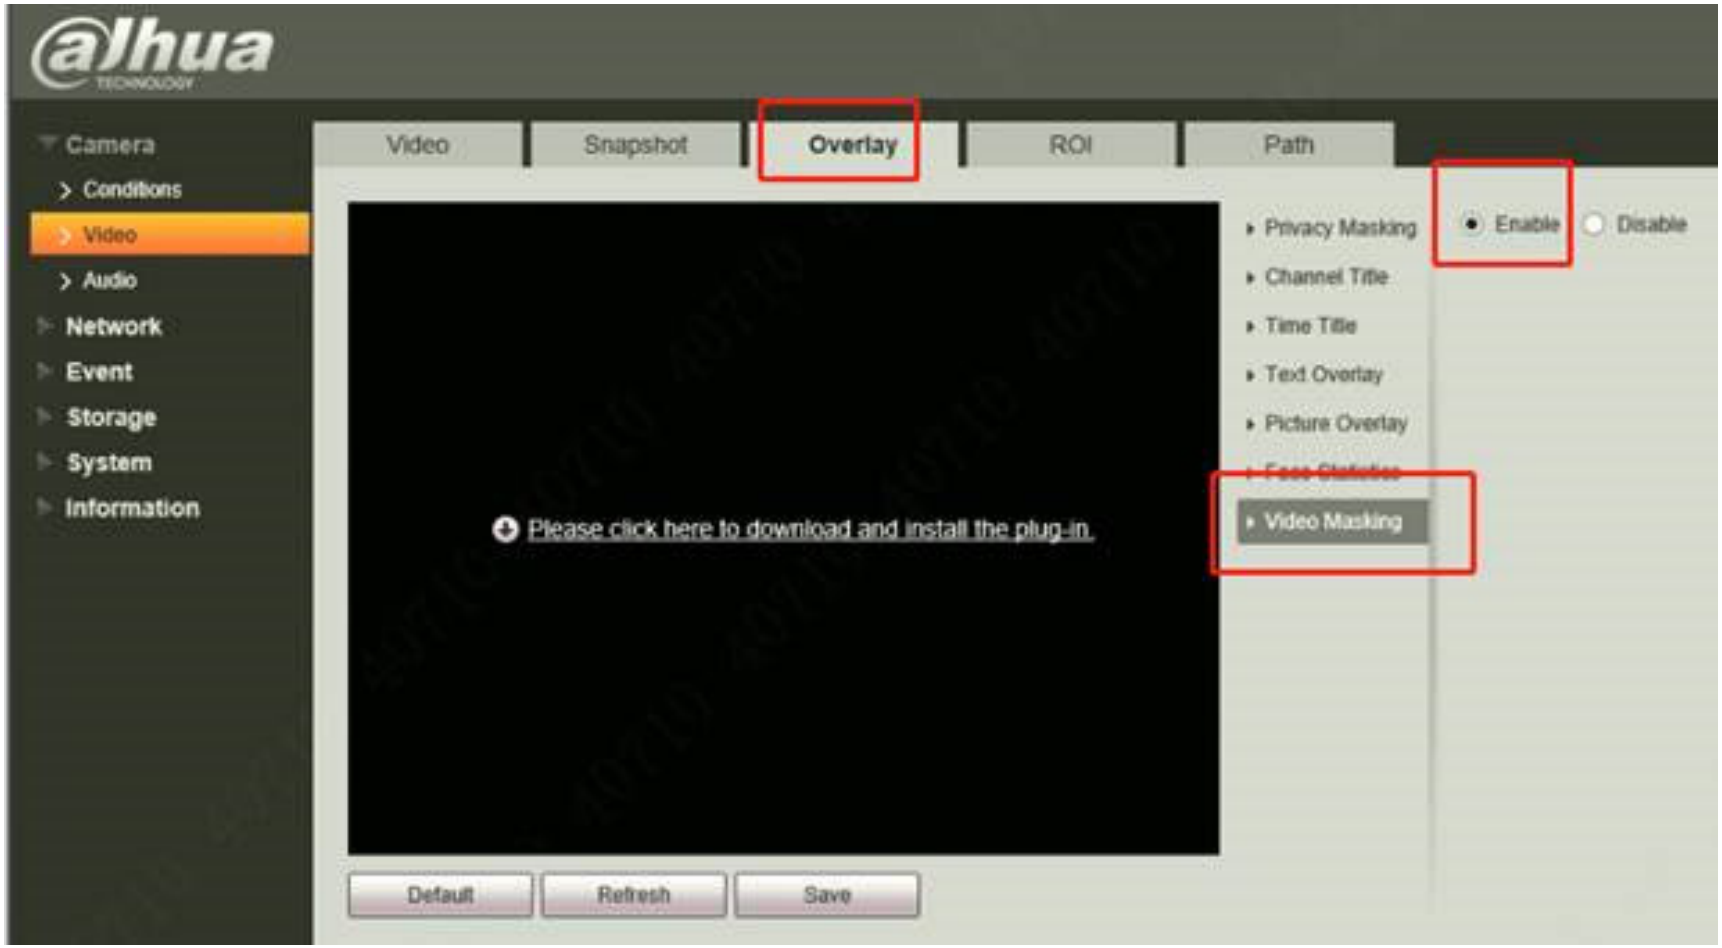
alhua
TECHNOLOGY
Camera
Conditions
Video
Audio
Network
Event
Storage
System
Information
Video
Snapshot
Overlay
ROI
Path
Please click here to download and install the plug-in.
Privacy Masking
Enable
Disable
Channel Title
Time Title
Text Overlay
Picture Overlay
Video Masking
Default
Refresh
Save

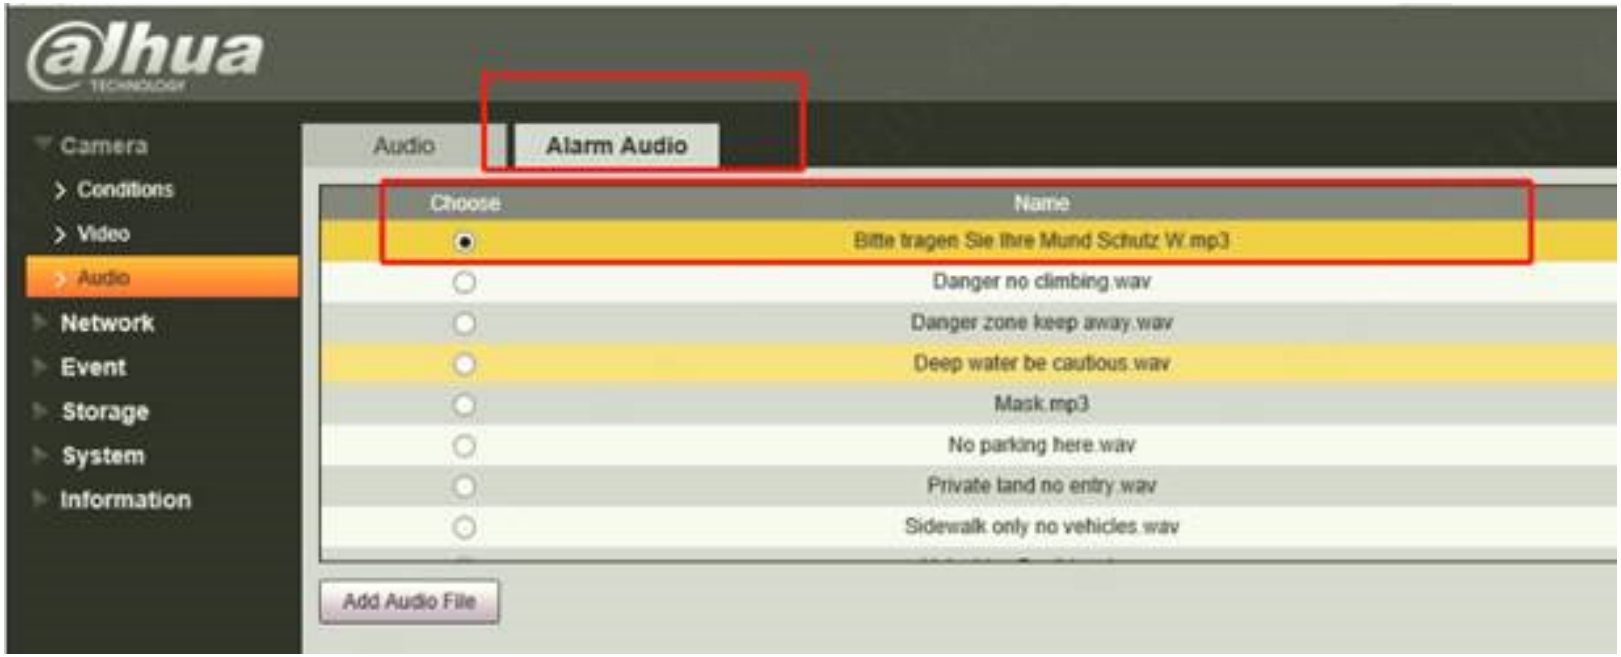
alhua
TECHNOLOGY
Camera
Conditions
Video
Audio
Network
Event
Storage
System
Information
Audio
Alarm Audio
Choose
Name
Bitte tragen Sie Ihre Mund Schutz W.mp3
Danger no climbing.wav
Danger zone keep away.wav
Deep water be cautious.wav
Mask.mp3
No parking here.wav
Private land no entry.wav
Sidewalk only no vehicles.wav
Add Audio File

Camera
Network
Event
Video Detection
Smart Motion Detection
Audio Detection
Smart Plan
IVS
Face Detection
Alarm
Abnormality
Disarming
Smart Plan
Refresh
Save

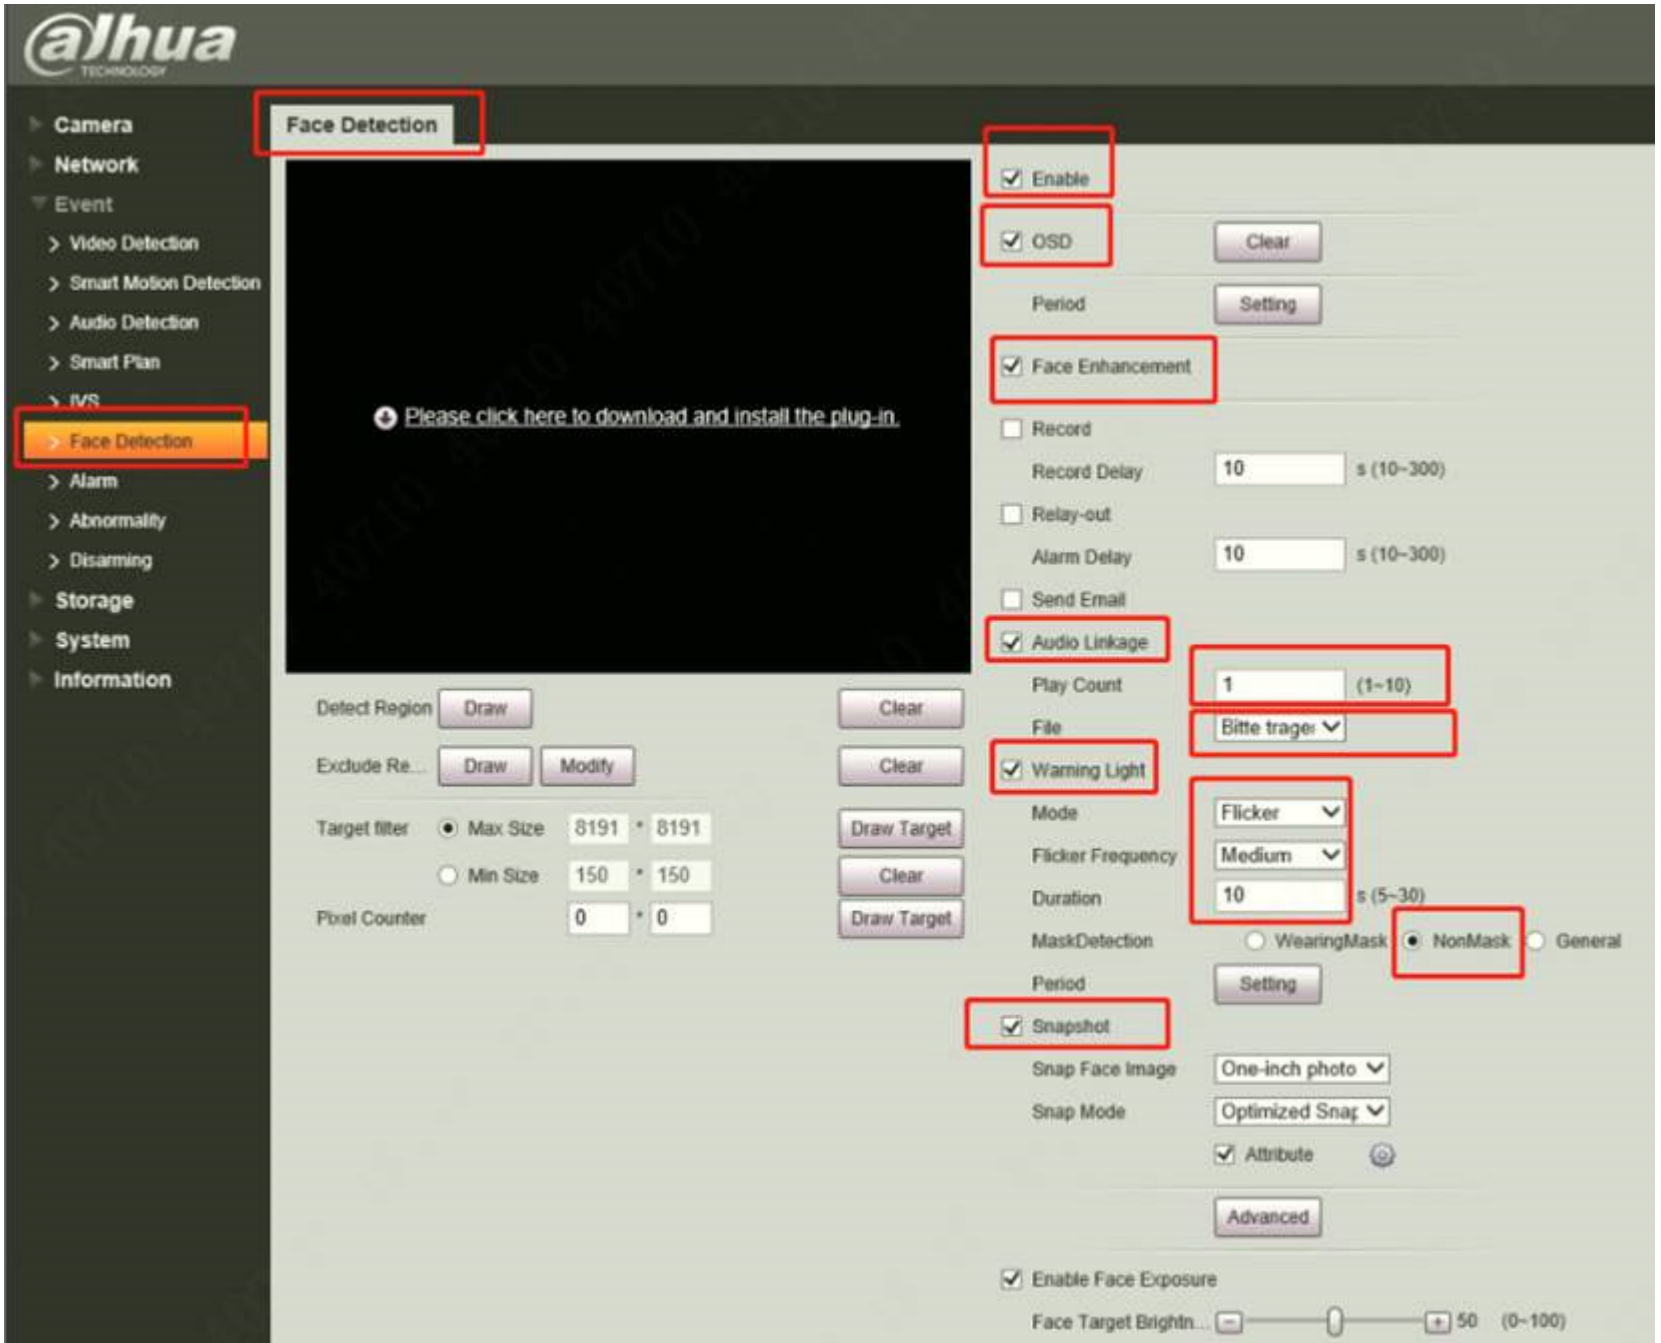
Camera
Network
Event
Video Detection
Smart Motion Detection
Audio Detection
Smart Plan
IVS
Face Detection
Alarm
Abnormality
Disarming
Storage
System
Information
Face Detection
Please click here to download and install the plug-in.
Detect Region
Draw
Clear
Exclude Re...
Draw
Modify
Clear
Target filter
Max Size
8191 * 8191
Draw Target
Min Size
150 * 150
Clear
Pixel Counter
0 * 0
Draw Target
Enable
OSD
Clear
Period
Setting
Face Enhancement
Record
Record Delay
10
s (10~300)
Relay-out
Alarm Delay
10
s (10~300)
Send Email
Audio Linkage
Play Count
1
(1~10)
File
Bitte trage
Warning Light
Mode
Flicker
Flicker Frequency
Medium
Duration
10
s (5~30)
MaskDetection
WearingMask
NonMask
General
Period
Setting
Snapshot
Snap Face Image
One-inch photo
Snap Mode
Optimized Snap
Attribute
Advanced
Enable Face Exposure
Face Target Brightn...
50
(0~100)