# FAST **14000** PUMP PRO PLUS **WIDE**



**STANDARD** 

Powerful and fast fogging system, can cover up to  $14000 \text{ m}^3$  in 200 seconds (4500 m<sup>3</sup> visibility less than 1 m).



### **GENERAL SPECIFICATIONS**

Weight of the fogging machine	about 59 KG	
Weight with packaging	about 63 KG	
Units on one pallet 100×120	4	
Dimension of the machine	30,5 X44,0 XH43,5	
Dimension of the packaging	49,0 X61,0 XH62,5	
Colors	white	
Working time without mains power	about 4 hours	
Heating from cold	about 5 hours	
Vertical mounting	yes, bracket included	
Horizontal mounting	no	
Usb port for monitoring	yes	
Nozzle tamper	yes	
Serial interface RS232 with UR FOG Standard protocol	yes	
Alarm kit	opzional	

### **FOGGING SYSTEM**

New heating system "Layer"	yes
Coverage in a single shot (visibility more than 1,5 m)	up to 14000 m <sup>3</sup>
Coverage in a single shot (visibility less than 1 m)	up to 4500 m³
Max seconds of fog emission	200 sec
Max fog emitted with full fog bag	9000 m³
Number of bag	1
Fog tank capacity	1 x 5000 ml
Shooting specification	programmable in seconds
Bag included	1

Complies with european CE	yes
Fog fluid is certified	yes
Meets european standard	yes

### ELECTRICAL SPECIFICATIONS

Mains power	230 V or 120 V	
Average power consumption	80 W	
Back up battery (not included)	yes	
Pir sensor validation input	yes	
Shot confirmation output	yes	
Power supply	yes	

It is a powerful and fast fogging system, ideal to protect large areas like big shops, warehouses, superstores or even to protect targets in open space.

It is prearranged to an easy wall installation (bracket included) and it has a side compartment to equip boards or accessories if needed.

**UR Fog S.r.l.** *Operation and delivery to:* Via Toscana 38 - 10099 San Mauro T.se (Torino) - Italy Phone: +39 11 0133037 E-mail: info@urfog.com




### Accessories and refills FAST 14000 PUMP PRO PLUS WIDE

CODE	ACCESSORIES AND REFILLS	FAST 14000 PUMP PRO PLUS WIDE
FFLXRC50	Fluid bag 5000 ml	
FFLXRC50FG	Fluid bag 5000 ml Food Grade	
F23PRUG7	Nozzle extension 7 cm	
F1M03UG3	3 holes nozzle	
F23KITD	Demo Kit (key + keyfob/receiver + button)	
F23KITA	Anti-robbery Kit: cable + jumper	
URRE	Relay board	
F123KEY	Arming key	
	Wall bracket Pump 14000 <i>included</i>	(included)
URTR	Keyfob + riceiver	
URT	Additional keyfob	
URRS232	Transceiver rs232 5/12 V	
URCLWF	Active Cloud Lan / WIFI board	
URCLWFA	Wifi antenna module	
URCLWF014	Mounting kit 1500 - 6000 - 14000 with external box (external plastic box + external flat cable + 1x24 mm rubber + 2x16 mm rubbers)	•
FPUM	2 handlers	



Active Cloud LAN / Wifi board The WIFI LAN board allows wired or wireless Lan connection. Through the extremely secure Cloud service, provided for free, it allows, in addition to system monitoring, to remotely arm, shoot and set shooting time of the fogging system.

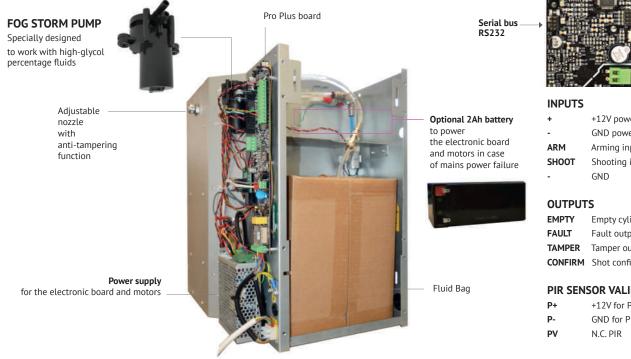

## **UR Fog S.r.l.** *Operation and delivery to:* Via Toscana 38 - 10099 San Mauro T.se (Torino) - Italy Phone: +39 11 0133037 E-mail: info@urfog.com



Exclusive patented system that allows to detect automatically if the nozzle has been obstructed by sending a signal in case of tampering.



Disposable recharge, very easy to replace, at a very competitive price.



Thanks to the massive insulation UR FOG fogging systems have a very low power consumption and can shoot for a long time in absence of mains power; temperature remains stable over time.

Long lasting operation time without mains The innovative thermal insulation of the heater allows UR Fog systems to work for a long period of time without mains

power: about 3 hours!

•))) (((

Electronic board

A unique serial bus to plug on the electronic board an add on card that allows to interface easily the machine with alarms and to control the fogging system even from remote locations. A standard protocol is available for all machines.

	D	oor tamper
Shooting seconds setting		
Cylinders reset	See. 9	Beat
Cytilluers reset		
		12V power input
		Inputs
	-	
	1	F Outputs
		PIR sensor
	1-0	validation input
	8 . Bett	
	0	
	C Granden	
Serial bus		
RS232		
	the second second	
	in the	
	202	
	INPUTS	
al 2Ah battery	+	+12V power input
er	-	GND power input
ctronic board	ARM	Arming input
tors in case Is power failure	SHOOT	Shooting input
s power failure	-	GND
	OUTPUT	S
I and the second se	EMPTY	Empty cylinder output
	FAULT	Fault output
	TAMPER	Tamper output
	CONFIRM	Shot confirmation output
Bag	PIR SEN	SOR VALIDATION INPUT
Bag	PIR SEN	
Bag		SOR VALIDATION INPUT +12V for PIR power supply GND for PIR power supply / COM. PIR

