


DHI-IPMPGI-221AB

Outdoor LED Screen



Scene

Suitable for use at the entrances and exits of parking lots in compounds, tourist attractions, shopping malls and more.

Technical Specification

Basic

Display Screen Type	LED
Display Color	Display in red, green, and yellow
Display Screen Dimensions	320 mm × 320 mm (12.60" × 12.60") (L × W)
Display Contents	Displays the available number of parking spaces
Pixels Configuration	1R1PG
Screen Resolution	1024 dots (32 × 32); 2 lines; pixel pitch: 10 mm (0.39")
Display Screen Lifespan	100,000 h
Brightness	6000 cd/m ²

Port

Network Port	2 ports, 100 Mbps Ethernet port (RJ-45)
--------------	---

General

Power Supply	100–240 VAC
Power Consumption	60 W
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Protection	IP54
Product Dimensions	2,000 mm × 700 mm × 140 mm (78.74" × 27.56" × 5.51") (L × W × H)


- Displays the text and symbols in red, green and yellow, and is suitable for use outdoors.
- Displays the number of available parking spaces.
- The brightness reaches up to 6,000 cd/m².
- The dot pitch is 10 mm (0.39").
- IP54 rated.
- Supports ground mount installation.
- Includes a network port that is used for configuration.
- The device can be tested through the upper computer software, making debugging easy.

Net Weight	≤70 kg (154.32 lb)
Gross Weight	≤115 kg (253.53 lb)
Installation	Floor-standing mount

Ordering Information

Type	Part Number	Description
Information Display Screen	DHI-IPMPGI-221AB	Outdoor LED Screen

Installation

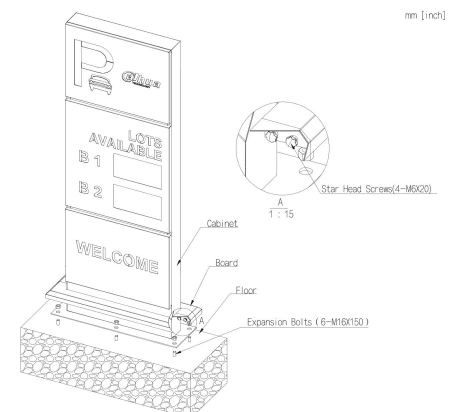

DHI-IPMPGI-221AB

Dimensions (mm[inch])

