



Dahua Access Control Temperature Monitoring

Temperature Monitoring / Face Recognition

WDR Camera

2.5D Curved Screen

Liveness Detection

Anti-glare Interference

Large Capacity

Mask Recognition

Fast Recognition Speed

Accurate Temperature Measurement

Abnormal Temperature Alarm



Temperature Monitoring
Distance: 0.3m-1.8m



Temperature Accuracy:
 $\pm 0.5^{\circ}\text{C}$





Temperature Monitoring
Speed: 0.2s



Easy Install And
Easy Move

Key Features

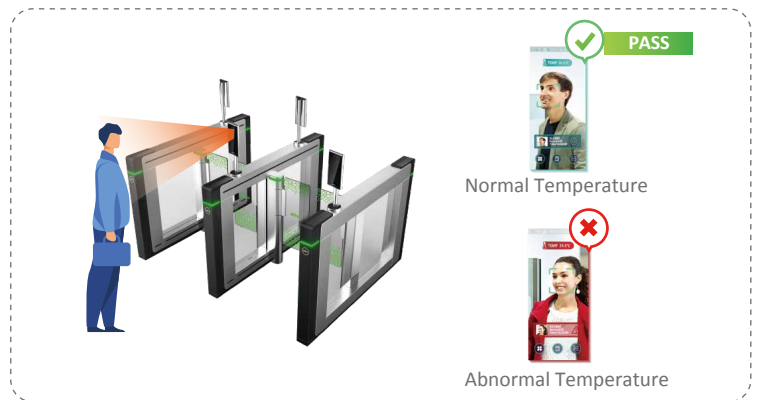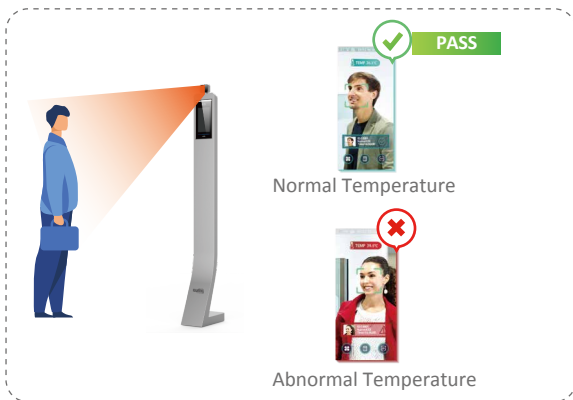


- Accurate monitoring of temperature, abnormal temperature alarm.
- Non-contact access to reduce cross-infection.
- Easy to install, easy to move.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.

Application Scenario



Commercial Building



Office Building



School



Factory

Products



DHI-ASI7213X-T1
(DSS-EXPRESS OR NVR Optional)

- Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 1.8m
- Sound Prompt: Abnormal temperature alarm



DHI-ASI7223X-A-T1
(DSS-EXPRESS OR NVR Optional)

- Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 1.8m
- Sound Prompt: Abnormal temperature alarm



DHI-ASI7213X-T1+ASF172X-T1
(DSS-EXPRESS OR NVR Optional)

- Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 1.8m
- Sound Prompt: Abnormal temperature alarm

* Design and specifications are subject to change without notice.

Ver. 2, May, 2020

DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

