

DH-PFA200W

Wall Mount Bracket



- \cdot Made from aluminum alloy and SGCC.
- · Matched with particular cameras, beautiful and elegant designed.
- · Comes with the small dome wall-mounted sunshield that can prevent rain, dirt, and provide shade protection.







Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, it works in temperatures ranging from -40 °C to +60 °C (-40 °F to +140 °F) and in environments with relative humidity of less than 90%.

Technical Specification

Structure


Casing Material	Aluminum alloy, SGCC
Product Dimensions	129.3 mm × 127.1 mm × 147.1 mm (5.09" × 5.00" × 5.79") (L × W × H)
Appearance Color	White
Net Weight	0.25 kg (0.55 lb)
Gross Weight	0.31 kg (0.68 lb)
Installation	Wall mount
Packaging Dimensions	154 mm \times 145 mm \times 79 mm (6.06" \times 5.71" \times 3.11") (L \times W \times H)
Applicable Model	Please see "Camera Accessories Selection"

Environment


Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10%-90% (RH)
Anti-corrosion Level	Basic Protection

Ordering Information			
Type	Model	Description	
Camera Mount	DH-PFA200W	Wall Mount Bracket	

Installation

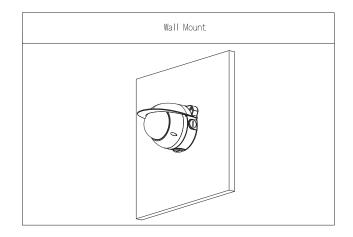

Dimensions (mm[inch])



Package Information

- Rain shade $\times 1$
- Mounting plate × 1
- M4×10 screw × 2