

Professional Digital Monitor


SLM-1510N

Feature

- Multi-Function Display
- True 10 bits Color processing engine
- Independent color management(ICM)
- Dynamic contrast control(DCC)
- Supported 1080p Full HD
- Build-in 2W+2W speaker
- VESA standard bracket
- Wall mountable capability
- Metal Casing.






Monitor Connection

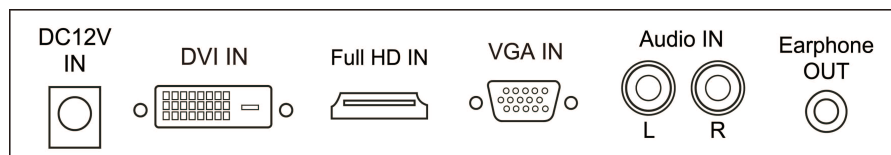

Specifications

Model	SLM-1510N
LCD panel	15.6"
Visible area (mm)	344.1x 193.5
Picture format	16: 9
Max. resolution	1920x1080
Pixel dot pitch (mm)	0.17925 x 0.17925
Colours	262K
Brightness	300 cd/m ² [LED]
Contrast	700 :1
Response time(Tr/Tf)	25 ms
View angle (U/D/L/R)	85/85/85/85
Full HD input	1x HDMI (A Type)
Audio input(R/L)	1x (RCAX2)
PC input	1x VGA input (D-Sub 15 pin) 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
OSD setting	Yes
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 12 watt
Dimensions (WxHxD) mm	382.4x234.4 x45
Weight	3 kg
Protective front glass	option
Operating temperature	0° to 50° C

Subject to technical changes without prior notice. Error excepted.

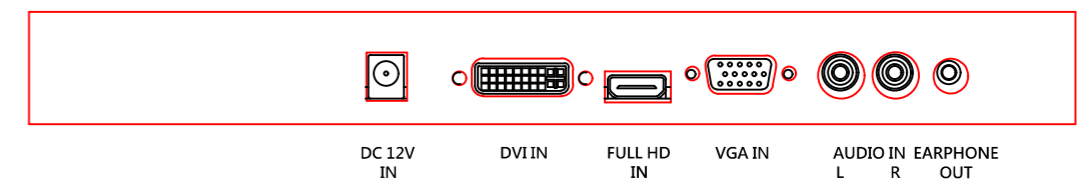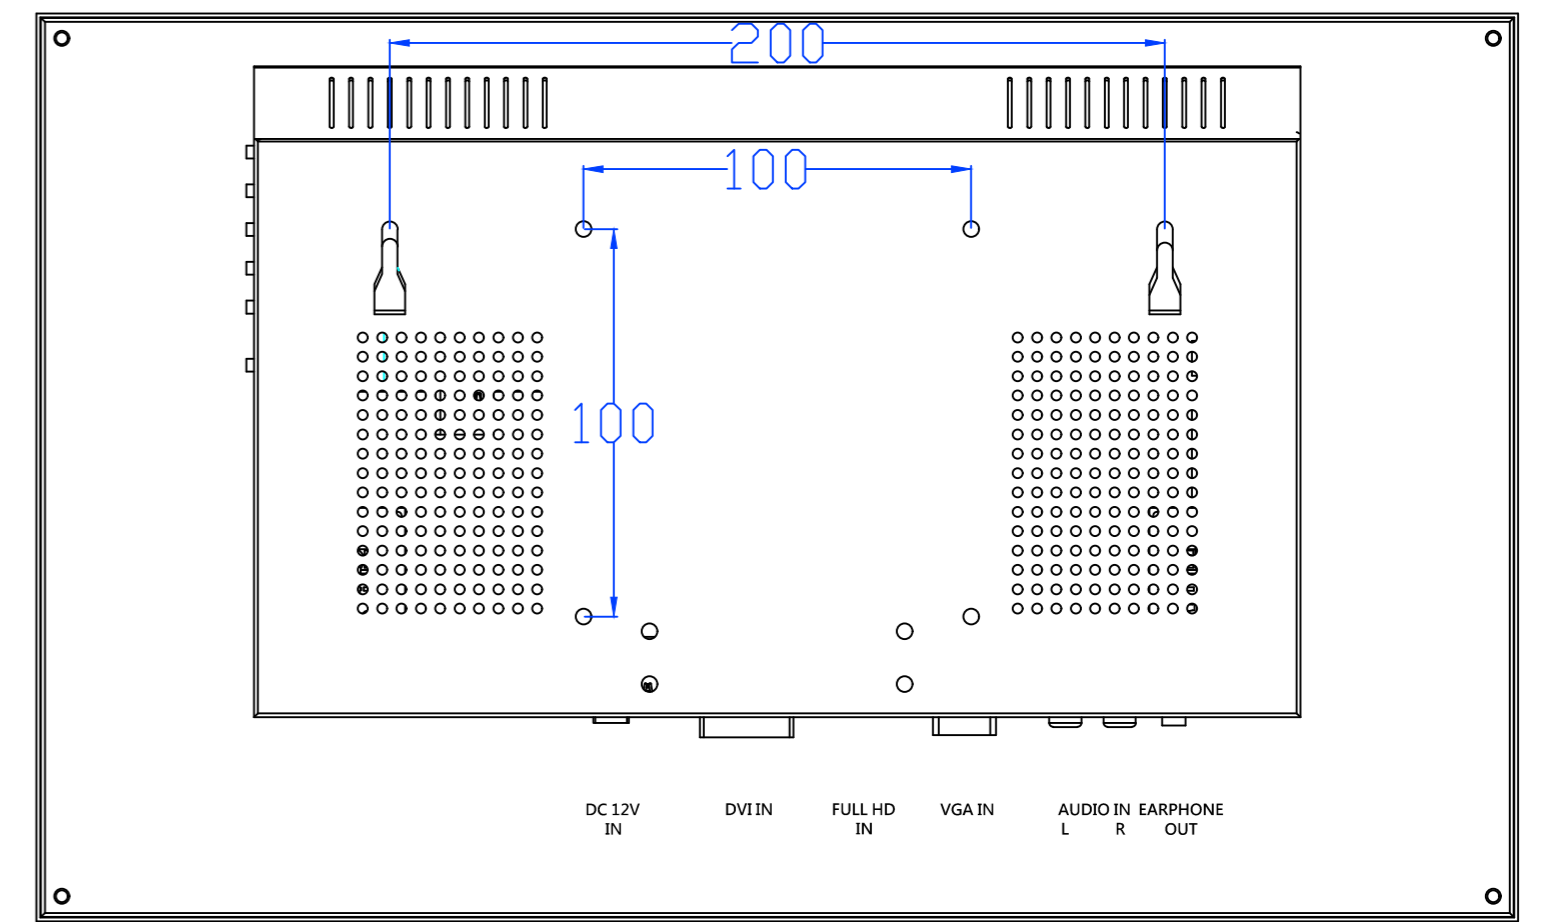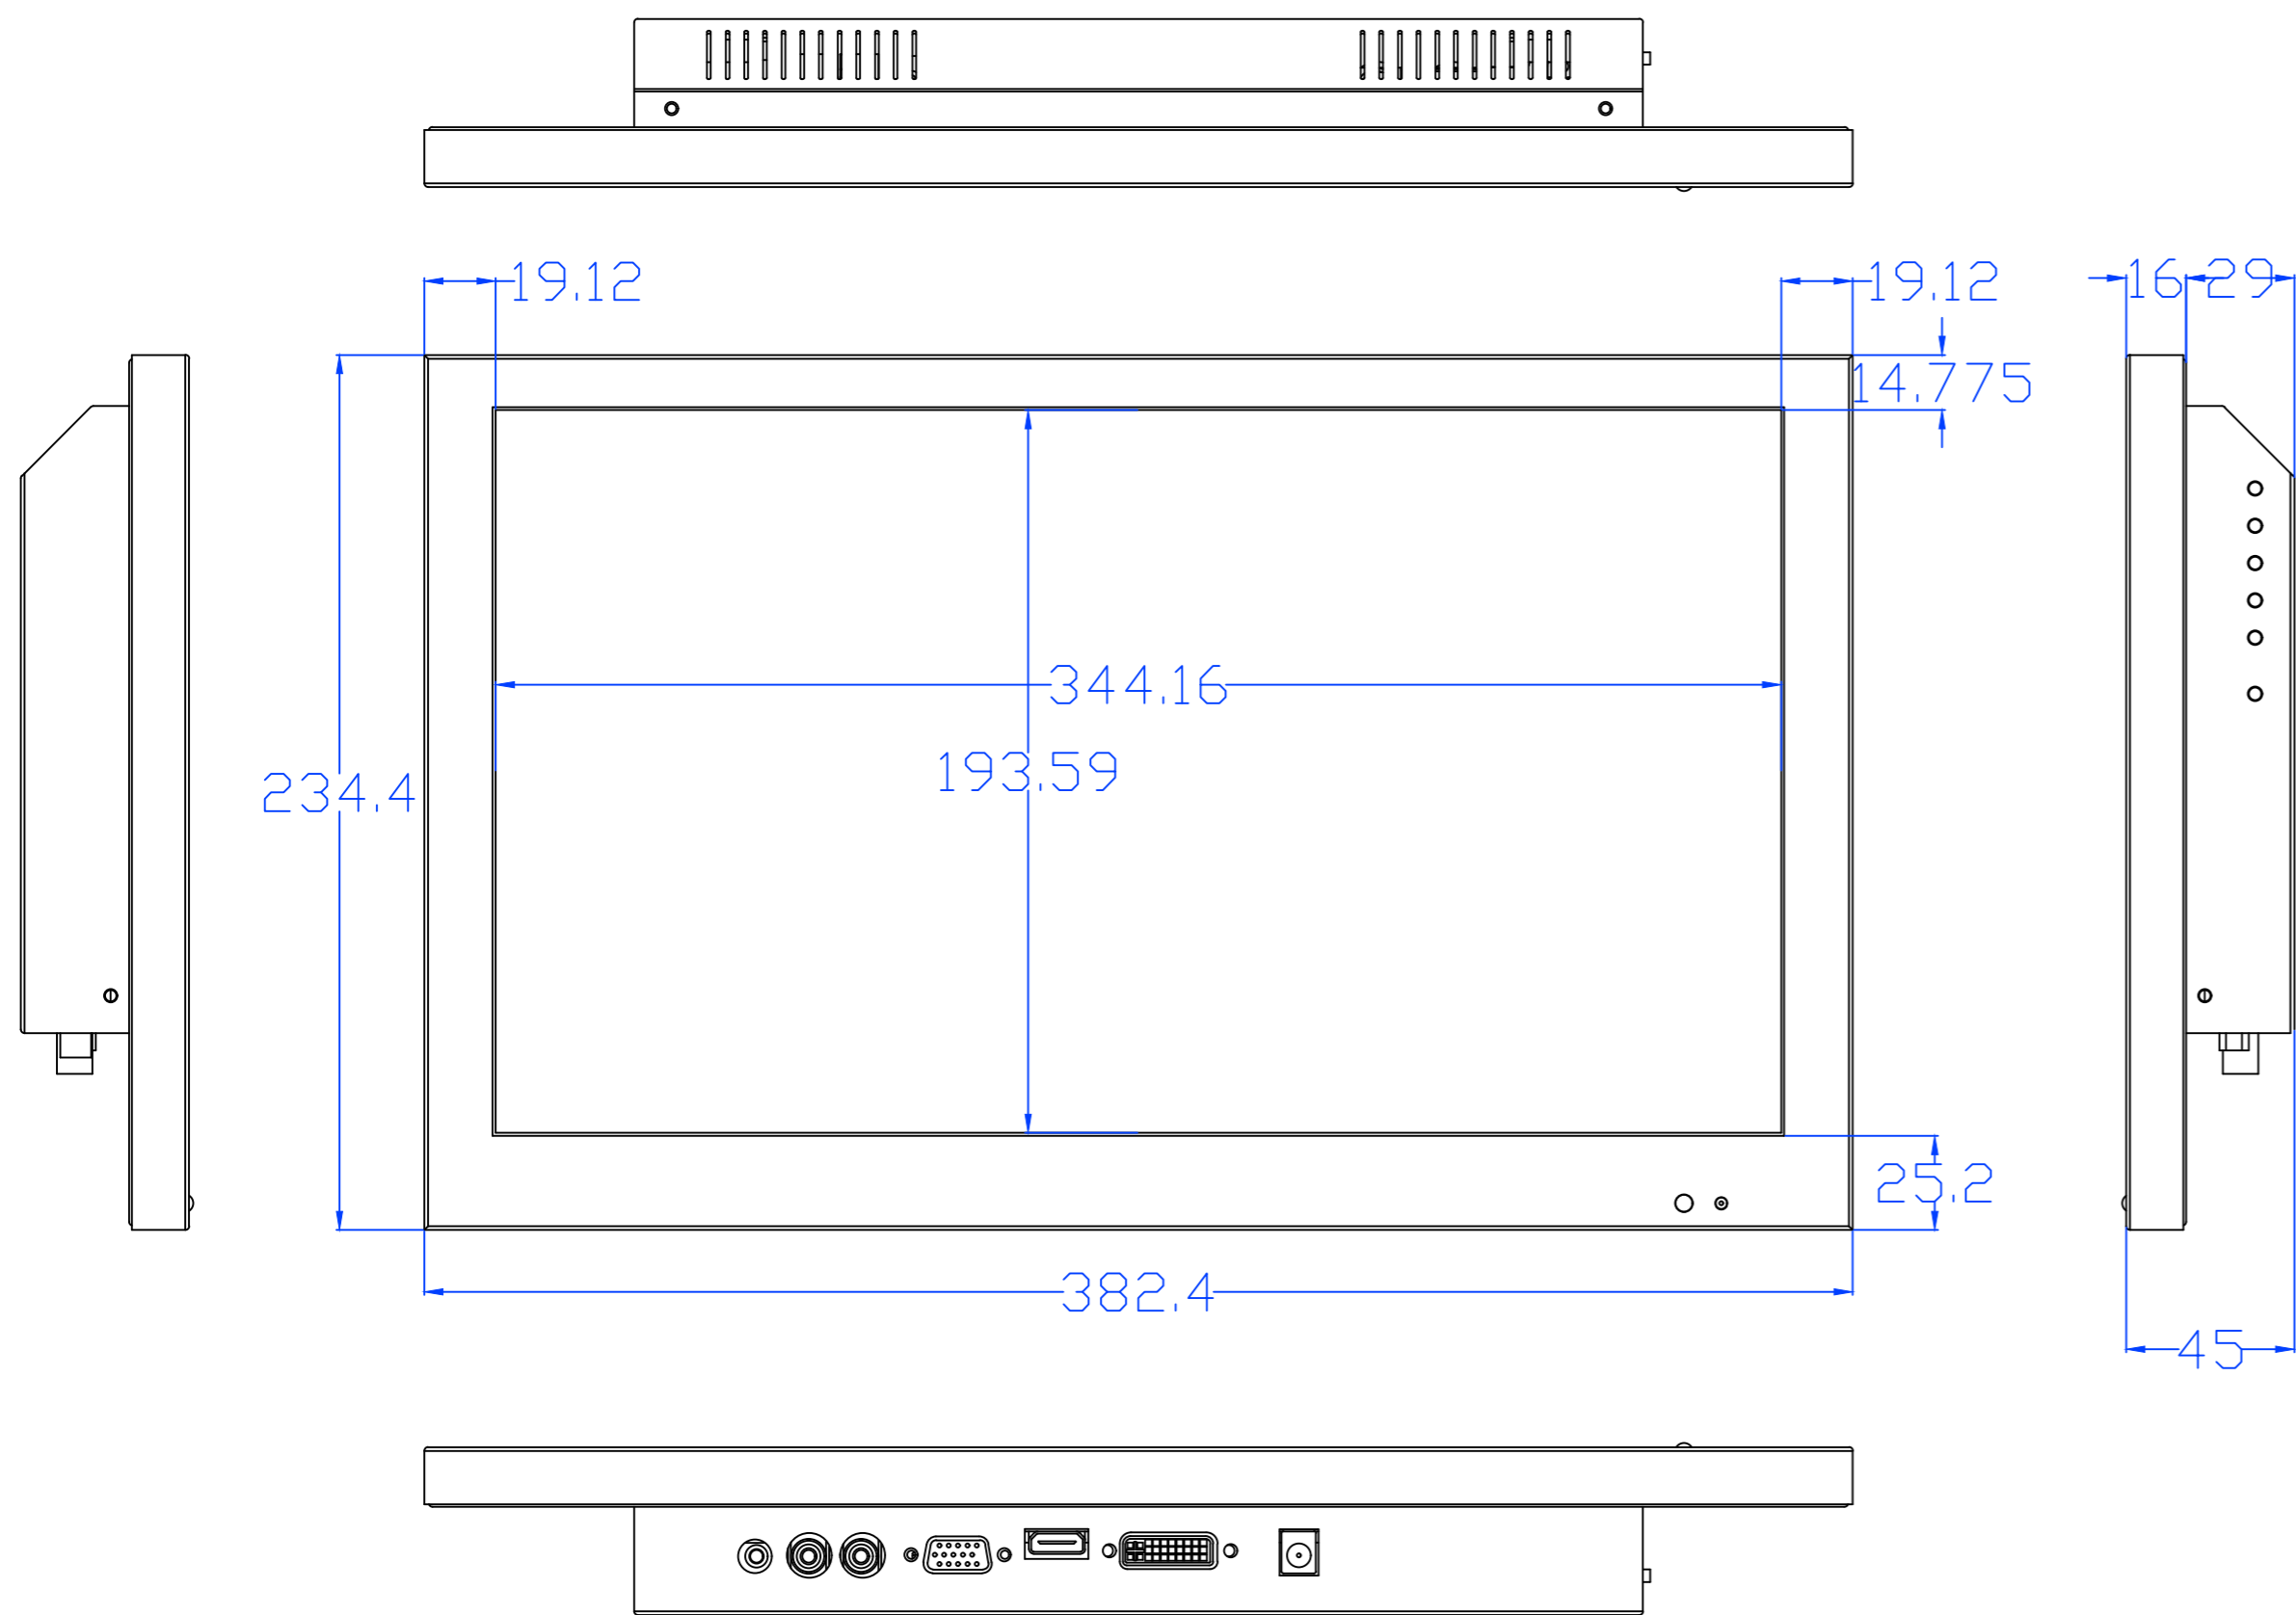

(MODE NO):	SLM-1510N		
(DATE):	2022 / 02 / 10	版本 (Ver.):	01