

## TM-22



### A 22" 10-point touch display with dual-hinge stand designed for multi-user interactive environments.

With the AG Neovo TM-22, industry professionals can keep an eye on budgets without losing sight of performance. Incorporating the advanced projected capacitive touch technology, the TM-22 not only comes with a stylish design but also offers smooth and accurate touch response. On top of LED backlighting and Full HD resolution, it comes with 10-point multi-touch capability that delivers seamless compatibility with Windows® 7 & 8 touch functions. The flexible dual-hinge stand ensures multi-user comfort and productivity. The TM-22 is the ideal multi-touch solution for a great diversity of interactive environments.

- > Incorporates Projected Capacitive Touch Technology
- > 10-point touch capabilities for systems with Microsoft® Windows® 7 and 8
- > LED-backlit technology with 1920 x 1080 Full HD resolution
- > Flush touch screen makes surface neat and clean
- > Connectivity: VGA, HDMI and DisplayPort
- > Built-in USB Port (USB 3.0) for easy connection with peripheral devices
- > HID compliant for easy integration without additional drivers
- > Built-in speakers
- > Flexible dual-hinge stand design to maximise viewing comfort for multiple users
- > Tilt capacity from - 5° to 90°
- > VESA standard wall mount
- > Kensington® Security socket

# TM-22


## Specifications

## TM-22

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD
	Panel Size	21.5"
	Max. Resolution	FHD 1920 x 1080
	Pixel Pitch	0.248 x 0.248
	Brightness	220 cd/m2 (Typical)
	Contrast Ratio	1,000 : 1 (Typical)
	Viewing Angle (H/V)	170°/160°
	Display Colour	16.7 M
	Response Time (GTG)	3 ms (GTG)
<b>Frequency (H/V)</b>	H Freq.	30kHz – 83kHz
	V Freq.	55Hz -75Hz
<b>Input</b>	VGA	15-Pin D-Sub
	HDMI	HDMI
	DisplayPort	DisplayPort
<b>USB Port</b>	USB Port	USB 3.0 x 4
<b>Audio</b>	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø)
	Speaker	2 W x 2
<b>Touch Screen</b>	Technology	Projected Capacitive
	Panel Interface	USB (Type-B, HID compliant)
<b>Power</b>	Power Supply	Internal
	Power Requirements	100 ~ 240V, 50 - 60Hz
	Consumption	< 25W (On)
		< 0.5W (Stand-by) < 0.5W (Off)
<b>Operating Conditions</b>	Temperature	0°C ~ 40°C (32°F~104°F)
	Humidity	10% ~ 85% (No condensation)
<b>Mounting</b>	VESA FPMPMI	Yes (100mm x 100mm)
<b>Dimensions</b>	with Base (W x D x H)	522.4mm x 238.5mm x 385mm (20.6" x 9.4" x 15.2")
	Packaging (W x H x D)	586mm x 186mm x 422mm (23.1" x 7.3" x 16.6")
<b>Weight</b>	Product Weight (with base)	6.6 kg (14.5 lbs)
	Packaging Weight	8.5 kg (18.7 lbs)
<b>Regulation Approval</b>	Certifications & Compliance	FCC, CB, CE, RoHS, GOST-R, WEEE, REACH
<b>Accessories</b>	Supplied	CD ROM (user manual), warranty card, power cord, 15-Pin D-Sub cable, USB cable, Audio cable



Integration of 10-point touch and projected capacitive touch technology provides accurate and precise touch experience

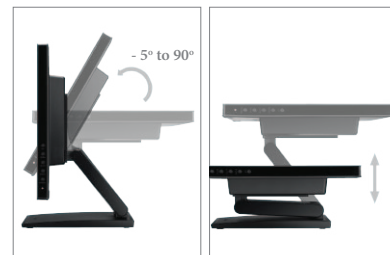

Flexible dual-hinge stand design to maximise viewing comfort for multiple users



Versatile connectivity: VGA, HDMI, DisplayPort and USB port allow for effortless system integration