


E911

3MP Indoor Mini Dome with Extreme WDR, SLLS, Fixed Lens



- 3 Megapixel
- Superior Low Light Sensitivity
- Fixed Lens with f2.1mm / F1.8
- Extreme WDR
- H.265 Compression
- 60 fps at 1920 x 1080
- Super Wide Angle
- Vandal Resistant (IK08)
- Built-in Analytics

PHOTO INDICATION

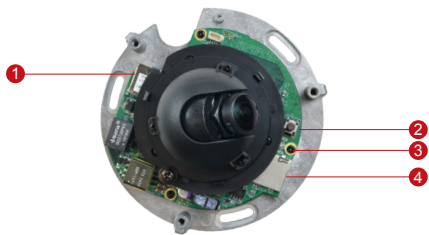

- 1 Ethernet Port
- 2 Reset Button
- 3 Power LED
- 4 Memory Card Slot

DIMENSION DIAGRAM



Unit: mm [inch]

ACCESSORY OPTIONS

| Dome Cover | | |
|------------|--|---------------------------------|
| PDCX-1106 | | 2-inch, smoke, non-vandal proof |

| Power Supply | | |
|--------------|--|---|
| PPOE-0001 | | IEEE 802.3af PoE Injector for Class 1, 2 or 3 devices, with universal adapter |

| Popular Mounting Solutions | |
|----------------------------|----------------------------|
| Surface | Accessories not required |
| Wall | PMAX-0316 |
| Pendant | PMAX-0111 PMAX-1400 |
| Gang Box | PMAX-0805 |
| NPT Standard Mounts | PMAX-0809 PMAX-1400 |

PRODUCT SPECIFICATION**E911****• Device**

| | |
|--------------------------|---|
| Device Type | Indoor Mini Dome |
| Image Sensor | Progressive Scan CMOS |
| Sensor Size | 1/3" |
| Effective Pixels | 2065 (H) x 1553 (V) (3.21 MP) |
| Day / Night | No |
| Low Light Sensitivity | Standard |
| Minimum Illumination | Color: 0.1 lux at F1.8 (30 IRE, 2400°K) |
| Mechanical IR Cut Filter | No |
| IR Sensitivity Range | 700 ~ 1100nm |
| IR LED | No |
| Electronic Shutter | 1/5 ~ 1/2,000 sec (manual mode); 1/5 ~ 1/10,000 sec (auto mode) |
| TV Lines | 1300 |
| S/N Ratio | 56 dB |

• Lens

| | |
|--------------------------|----------------------------|
| Focal Length / Aperture | Fixed focal, f1.9mm / F2.8 |
| Iris | Fixed iris |
| Focus | Fixed focus |
| Lens Mount | Board mount |
| Horizontal Viewing Angle | 117.5° |
| Viewing Angle Adjustment | Pan: ±90°; Tilt: 0° ~ 90° |

• Video

| | |
|--------------------------------|--|
| Compression | H.264 (Baseline / Main / High profile), MJPEG |
| Max. Frame Rate vs. Resolution | 30 fps at 2048 x 1536; 60 fps at 1920 x 1080; 30 fps at 1280 x 960; 60 fps at 1280 x 720; 30 fps at 800 x 600; 30 fps at 640 x 480; 30 fps at 320 x 240 |
| Multi-Streaming | Simultaneous triple streams based on three configurations |
| Bit Rate | 128 Kbps - 12 Mbps (per stream) |
| Bit Rate Mode | Constant, Variable |
| Image Enhancement | Extreme WDR (145 dB); White balance: automatic, hold, and manual; Brightness; Contrast; Sharpness (auto); Auto gain control; 2D+3D digital noise reduction; Flickerless; Digital Image Stabilizer*; Defogging |
| Privacy Mask | 4 configurable regions* |
| Text Overlay | User defined text on video |
| Image Orientation | Image flip, mirror and rotate* |
| Built-in Analytics | Object Based Motion Detection, Tamper, Shock Detection, Line Crossing*, Loitering*, Enter Area*, Missing Object*, Unattended Object* (Some of the algorithms may not be available in the first release, can be upgraded for free later) |

• Network

| | |
|--------------------|---|
| Protocol & Service | IPv4/v6, TCP, UDP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, RTCP, SMTP, FTP, IGMP, ICMP, ARP, Bonjour, UPnP, QoS, SNMP, IEEE 802.1X |
| Ethernet Port | 1, Ethernet (10/100 Base-T), RJ-45 connector |
| Security | IP address filtering; HTTPS encryption; Password protected user levels; Anonymous login; IEEE 802.1X network access control |

• Alarm

| | |
|----------------|--|
| Alarm Trigger | Video motion detection (10 regions), Intelligent event detection |
| Alarm Response | Notify control center, Change camera settings, Command other devices, E-mail notification with snapshots, Push notification to mobile device, Save video to local storage, Upload video to NVR server, Upload video or snapshot to FTP server, Activate external device through digital output |

• Interface

| | |
|---------------|--|
| Local Storage | MicroSDHC/MicroSDXC memory card slot (card not included) |
|---------------|--|

• General

| | |
|----------------------------|---|
| Power Source / Consumption | PoE Class 2 (IEEE802.3af) / 6.49 W |
| Weight | 217 g (0.48 lb) |
| Dimensions (Ø x H) | 110 mm x 58 mm (4.3" x 2.3") |
| Environmental Casing | Vandal resistant (IK09) |
| Mount Type | Surface, Wall, Pendant, Gang box |
| Starting Temperature | -10°C ~ 50°C (14°F ~ 122°F) |
| Operating Temperature | -10°C ~ 50°C (14°F ~ 122°F) |
| Operating Humidity | 10% ~ 85% RH |
| Approvals | CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B), IK09, UL (for optional PoE injector) |

• Integration

| | |
|-------------------------|---|
| Unified Solution | Fully compatible with ACTi software |
| ISV Integration | Software Development Kit (SDK) available ; ONVIF compliant |
| GPS Position | Manual setting |
| Firmware Access Browser | Microsoft Internet Explorer 9.0 or newer (full functionality) Safari with QuickTime installed, and other browsers with VLC installed (partial functionality) |

* Functionality will be available in future firmware update