

DH-MV-L5043CG26E

- 256MB on-board frame buffer
- Support multiple image data formats
- Supports flat field correction for multiple user groups
- Conform to CE, FCC, RoHS certfcatons
- Software trigger/Hardware trigger/Free run mode
- Compatible with GigE Vision protocol and GenlCam standard




Specification

Model	Sensor	Sensor type	Resolution	Line rate (Hz)	Bit depth	Interface	Mono/Color	Pixel size(μ m)
DH-MV-L5043CG26E	E2V	CMOS	4096x2	26K	12	GigE	Color	5x5

Model	DH-MV-L5043CG26E			
SNR	42dB			
Dynamic Range	70dB			
Sensitivity	81 LSB/(nJ/cm²)			
GPIO	6-pin Hirose connector for external power supply; 12-pin Hirose external trigger connector,2 channels for RS422/singleEnded input, 2channels for RS422/singleEnded output,1 channel for RS422/singleEnded is able to configure input/output,and 1 channel for GPIO			
Image Format	Mono8,BayerRG8/10/10Packed/12/12Packed,RGB8packed,YUV422Packed			
Gain	X1~X6			
Exposure Time	8μS~1S			
Trigger Input	RS422			
Dimensions	62mmx62mmx35mm(not including lens mount and rear case connector)			
Flat Field Correction	Support the import/export of correction result			
Weight	230g			
Power Supply	DC power supply by Hirose connector, with voltage range from 12V to 24V			
Lens Mount	M42*1(FBL:12.00mm),M42 to C, M42 to F			
Power Consumption	12V≈4.5W			
Temperature	Storage temperature:-30° C~ + 80° C; Operation temperature:-30° C~+50° C			

L5043CG26E

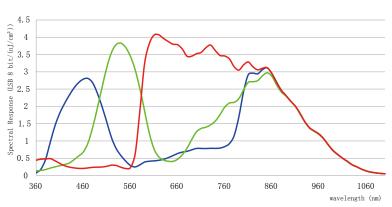


Quantum Efficiency Curve for Mono and Color Sensor


Dimensions








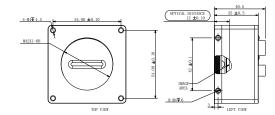



IO Interface Instruction

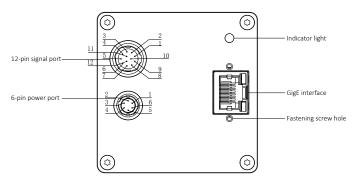

Pin	Signal	Description
1	Line1_in-	RS422 input-
2	Line1_in+	RS422 input +/singleEnded input
3	Line3_inout-	RS422 input/output-
4	Line3_inout+	RS422 input/output +/singleEnded output/output
5	Signal ground	Ground
6	Line5_out-	RS422 output-
7	Line5_out+	RS422 output +/singleEnded output
8	Line2_in-	RS422 input
9	Line2_in+	RS422 input +/singleEnded input
10	Line4_GPIO	SingleEnded input/output
11	Line6_out-	RS422 output-
12	Line6_out+	RS422 output +/singleEnded output

Pin	Signal	Description
1	Power	DC 12V-24V input
2	Power	DC 12V-24V input
3		
4		
5	GND	Ground
6	GND	Ground