

DH-HAC-HF3805G

8MP Starlight HDCVI Box Camera

HDCVI



- 4/3" 8MP progressive scan CMOS
- M43 mount lens
- 30fps@3840×2160(HDMI)/15fps@3840×2160(BNC)
- 140db WDR
- Ultra-low starlight technology, 2D&3D NR
- HDMI video output directly
- Built-in Mic
- Software upgrade with USB
- Intelligent functions
- Up to 500m transmission with RG59 coaxial cable



System Overview

DH-HAC-HFW3805G adopts high performance ISP and advanced 4/3" 8MP image sensor, which can bring vaster coverage and superiorer image details in 7/24 with the 4K resolution,even in extreme lowlight conditions it also can provide outstanding visibility and excellent 24 hours colorful image.That makes it easy to collect evidence and effective retrospective analysis.As the world's 1st 4K-coaxial HD camera Dahua HDCVI technology overcome the common bottleneck of coaxial signal transmission bandwidth.Whether for new-build or upgrading,existing analog infrastructure can be well reused.Just change the 4K frontward camera and backend encoder you can enjoy the 4K visual feast in application.

Functions

4K Technology

4K technology as a revolutionary breakthrough in image,which enhance the expressive image of essence,allowing users to experience the best picture quality brought about by the visual feast.For the purposes of 4K surveillance with four times the 1080P resolution,presented to the user with more details.Under the same scenario by raising the amount of pixels with the larger sensor it will reduce the total quantity of cameras and finally lower the whole project cost.

M43 Lens Mount

As we all knows lens is one of the key components that affects the surveillance image quality.For providing the best image to our customers we designed innovatively with M43 lens interface on HF3805G which is used on SLR cameras normally.So it is compatible with all kinds of M43 mount lens include prime lens and vari-focal length lens on the market according to different distance identification.

Starlight+

With the adoption of large-size pixel sensor and smart image process algorithm,HAC-HF3805G is able to provide incomparable performance even under extreme lowlight environment.The starlight feature allows more colourful feature details to be captured and accurate color to be recognized at night or in scenes with limited illumination.

Multi-outputs

The camera supports video outputs simultaneously with a HDMI and a BNC connector.In addition HDMI port can output 4K&4MP@30fps video to monitor or link to HDMI decoder directly without a backend.Multi-outputs facilitates construction in such situations as debugging with a tester.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e.video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the XVR,such as sending control signal or triggering alarm.Moreover,HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss.It supports up to 700m transmission for 4K and 4MP HD video via RG6 coaxial cable, and up to 300m via UTP cable.*

* Actual results verified by real-scene testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system,making itself a best choice for investment protection.HDCVI system can seamlessly upgrade the traditional ana-log system without replacing existing coaxial cabling.The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Wide Dynamic Range

Embedded with industry leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. Ultra WDR (140dB) optimizes both the bright and dark areas of a scene at the same time to provide amazing usable video.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design.making it suitable for most environment such as bank,manufacturing and commercial facilities.


Supporting dual voltage input (DC 12V±25%/AC 24V±25%). This camera suits even the most unstable power supply conditions.Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Technical Specification		Certifications	
Camera		Certifications	
Image Sensor	4/3" CMOS	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)	
Effective Pixels	3840(H)×2160(V), 8MP	Interface	
Scanning System	Progressive	Audio Interface	1-channel audio in
Electronic Shutter Speed	1/3s~1/100,000s	Alarm I/O	2/1
Minimum Illumination	0.001Lux/F1.2(Color,1/3s,30IRE) 0.0005Lux/F0.95 (Color,1/3s,30IRE) 0.003Lux/F0.95 (Color,1/30s,30IRE) 0.0003Lux/F0.95 (B/W,1/3s,30IRE) 0.002Lux/F0.95 (B/W,1/30s,30IRE)	Electrical	
S/N Ratio	More than 65dB	Power Supply	12V DC ±25%/24V AC ±25%
IR Distance	NA	Power Consumption	Max 6.4W (DC12V)
IR On/Off Control	NA	Environmental	
IR LEDs	NA	Operating Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH * Start up should be done at above -30°C (-22°F)
Audio In	Built-in Mic	Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Lens		Ingress Protection & Vandal Resistance	NA
Lens Type	External	Construction	
Mount Type	M43-mount	Casing	Aluminium
Focal Length	NA	Dimensions	144.5mm×82mm×73.7mm (5.69"×3.23"×2.90")
Max Aperture	NA	Net Weight	0.62kg (1.36lb)
Angle of View	NA	Gross Weight	0.83kg (1.83lb)
Focus Control	N/A		
Close Focus Distance	NA		
Pan / Tilt / Rotation			
Pan/Tilt/Rotation	Pan: NA Tilt: NA Rotation: NA		
Video			
Resolution	8MP (3840×2160)		
Frame Rate	PAL:4K@12.5fps;4M@25fps NTSC:4K@15fps;4M@30fps		
Video Output	1-channel HDMI video output & 1-channel BNC video output		
Day/Night	Auto (Electronic) / Manual		
OSD Menu	Multi-language		
BLC Mode	BLC / HLC / WDR		
WDR	140dB		
Gain Control	AGC		
Noise Reduction	2D/3D		
White Balance	Auto / Manual		
Smart IR	NA		

Ordering Information

Type	Part Number	Description
8MP Camera	DH-HAC-HF3805GP	8Megapixel Ultra WDR Boxed Camera, PAL
	DH-HAC-HF3805GN	8Megapixel Ultra WDR Boxed Camera, NTSC
Accessories	PFB121W	Wall Mount Bracket
	PFB110W	Wall Mount Bracket
	PFH610V	14" Vandal-proof Housing
	PFM810	POC Transceiver

Dimensions (mm/inch)

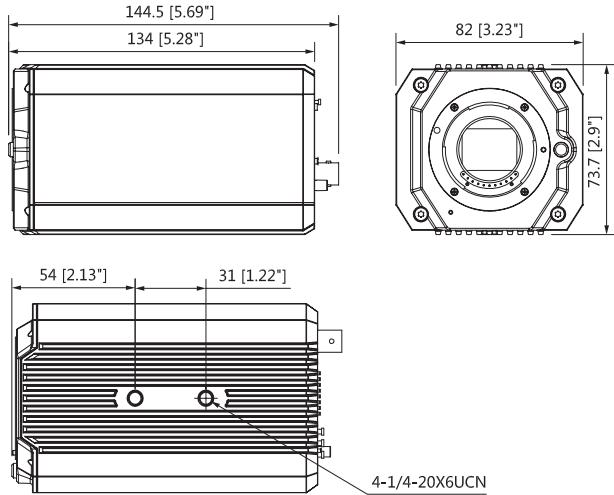

Dimensions (mm/inch)

Optional:



PFB121W
Wall Mount Bracket



PFB110W
Wall Mount Bracket



PFH610V
Outdoor Housing



PFM800-4MP
Passive HDCVI Balun